

Sydney Cotbed ASSEMBLY INSTRUCTIONS



IMPORTANT! KEEP FOR FUTURE REFERENCE

Dimensions(cm): (L)144 x (W)76 x (H)80* Fits Mattress Size(cm): (L)140 x (W)70 • Easy assembly • Safe & Sturdy • 3 Base Height Positions • Teething Rails • Converts into Junior Bed

*Approx. measurements only. Sizes may vary.

Contact Us... E sales@kinder-valley.com T 0844 7744644 - Option 2 www.kinder-valley.com

FACTORY CODE



SYDNEY COTBED ASSEMBLY INSTRUCTIONS

Before you start

IMPORTANT! KEEP FOR FUTURE REFERENCE

Instructions for safe use:

WARNING - Be aware of the risk of open fire and other sources of strong heat, such as electric bar fires, gas fires, etc. in the near vicinity of the cot.

WARNING - Do not use this child's cotbed if any part is broken, torn or missing and use only spare parts approved by Kinder Valley.

WARNING - Do not leave anything in the cotbed or place the cotbed close to another product, which could provide a foothold or present a danger of suffocation or strangulation, eg. strings, blind/curtain cords etc.

WARNING - Do not use more than one mattress in the cotbed.

This Kinder Valley cotbed conforms to BS EN 716:2008+A1:2013 and the junior bed conforms to BS 8509:2008+A1:2011.

This Kinder Valley cotbed is suitable from birth. In cot mode there are 3 mattress base height positions. The lowest position is the safest and should always be used in that position as soon as the baby is able to sit up.

When the cotbed is converted into bed mode, the minimum age should not be less than 18 months and no more than 4 years old.

Thickness of the mattress shall be such that the internal height (surface of the mattress to the upper edge of the cot frame) is at least 500mm in the lowest position of the cot base and at least 200mm in the highest position of the cot base.


We recommend you use any Kinder Valley mattress size 140cm x 70cm x 10cm. The length and width shall be such that the gap between the mattress and sides and ends does not exceed 30mm.

All assembly fittings should be checked regularly and retightened as necessary. To prevent injury from falls, when the child is able to climb out of the cotbed, the cotbed should be converted into a junior bed.


This cot bed is designed to be dismantled and packed flat for storage or transportation.

Fixtures & Fittings

CHECK THAT YOU HAVE ALL FIXTURES AND FITTINGS BEFORE ASSEMBLY, AND ENSURE THEY ARE NOT BROKEN.

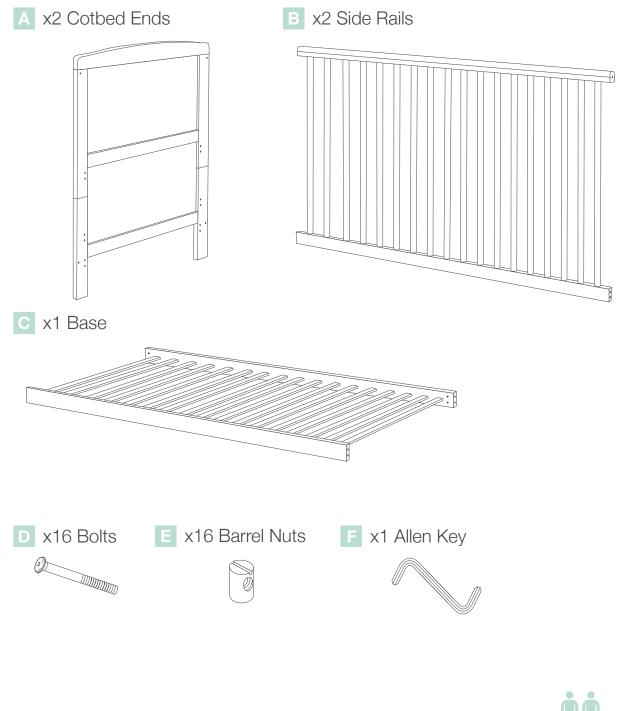


Number of people to assemble: Two adults are required to assemble this item.

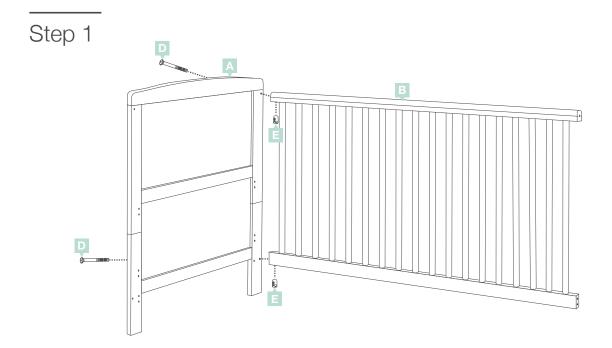


Join Cotbed End A to Side Rail B with x2 Bolts D and x2 Barrel Nuts E.

Step 2

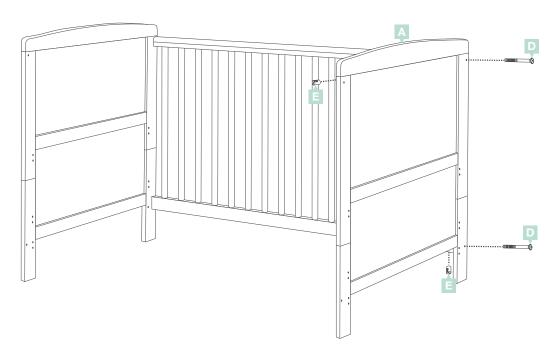


Join remaining Cotbed End A to Step 1 with x2 Bolts D and x2 Barrel Nuts E.

IMPORTANT - RETAIN FOR FUTURE REFERENCE

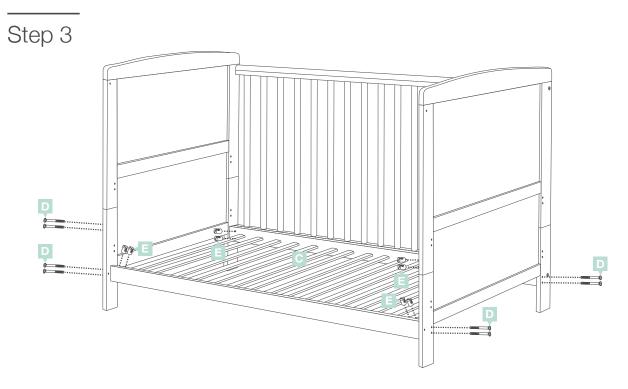

Join Cotbed Base C to Step 2 at the required base height position with x8 Bolts D and x8 Barrel Nuts E.


Step 4

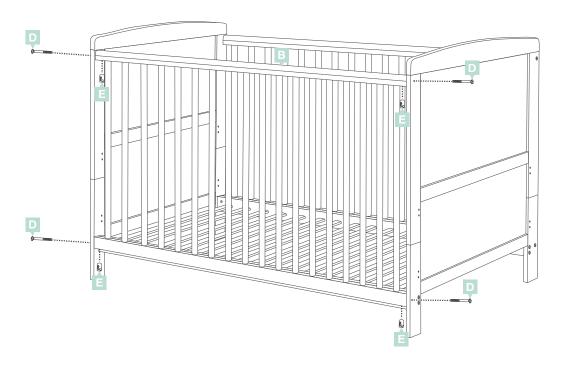

Complete assembly of your Cotbed by joining the remaining Side Rail \square with x4 Bolts \square and x4 Barrel Nuts \square .


IMPORTANT - RETAIN FOR FUTURE REFERENCE

Step 5 - For when converting to a Junior Bed



Firstly, fully disassemble the cotbed. Secondly remove the lower half of both Cotbed Ends A as shown in the above diagram.


Step 6

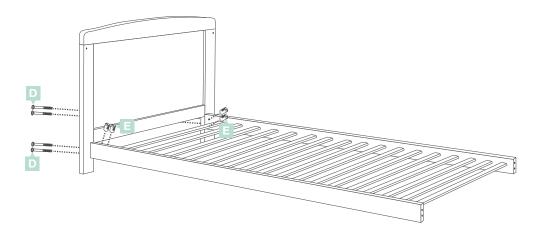

Join converted Cotbed End Step 5 to Cotbed Base C using X4 Bolts D and X4 Barrel Nuts E.

IMPORTANT - RETAIN FOR FUTURE REFERENCE

Step 7

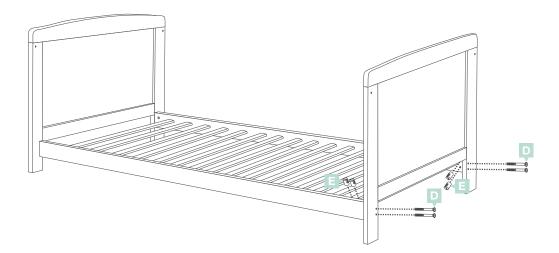

Complete assembly of your Junior Bed by joining the second converted Cotbed End Step 5 to Step 6 using x4 Bolts D and x4 Barrel Nuts E.